



Infraestrutura CISCO para ISPs

Guilherme Araujo
guaraujo@cisco.com

2019

Tendências no Mundo Digital



Mais Dados

8GB

De tráfego Internet por mês de PCs e tablets em 2021*

Mais Dispositivos

6.1B

Usuários de smartphones no mundo em 2020***

Mais Apps

20-50%

Aumento de banda nas empresas por ano até 2018**


* Cisco Visual Networking Index

**US The Census Bureau of the Department of Commerce, 2015

*** Ericsson mobility report - <http://www.ericsson.com/ericsson-mobility-report>

Forte Preferência de Contratar do Provedor

- Network Service Provider
- Direct from Vendor
- Value Added Reseller
- Local Consultant
- Don't want Managed
- Don't Know

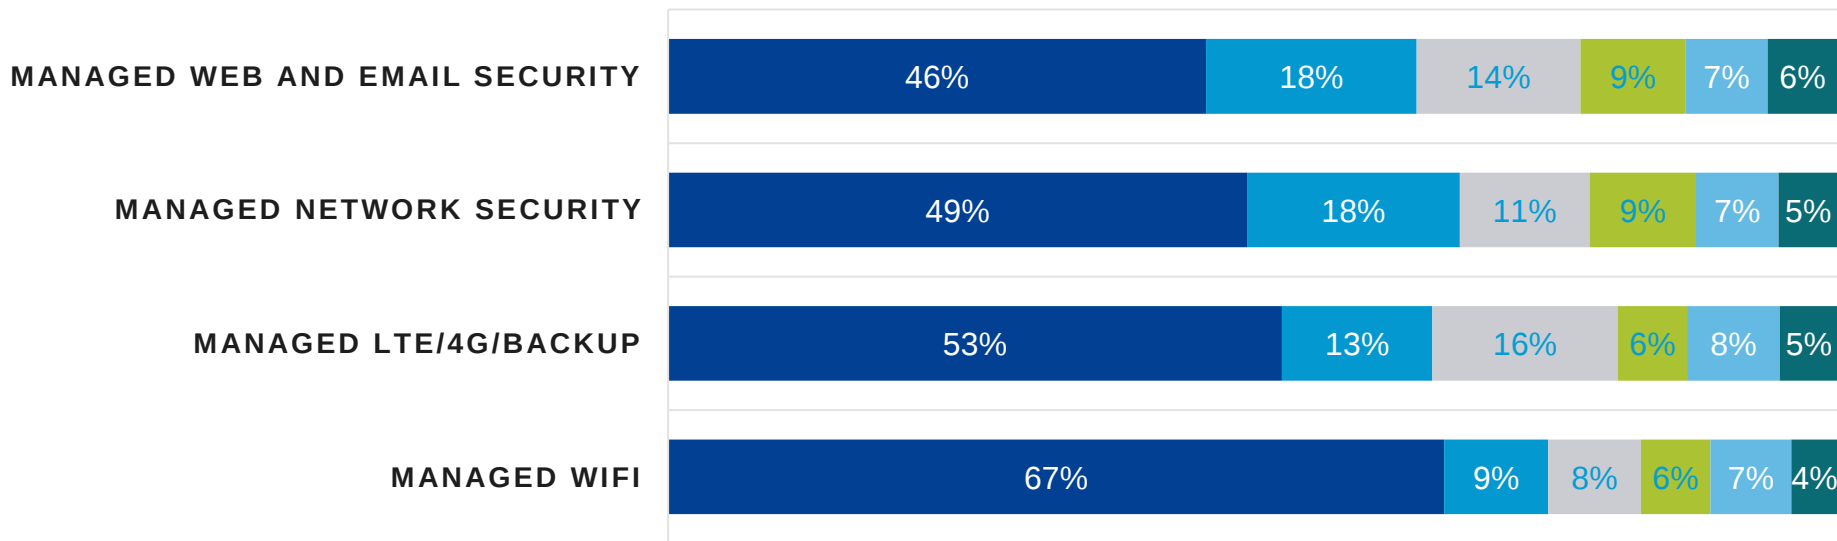

SMBs querem comprar Serviços Gerenciados do provedor de rede.
Menos de 10% não quer uma solução gerenciada.

Capturando Essa Oportunidade...

Aumento da Margem

Com mais oferta de SVA



Eficiência Operacional

Aproveitando a automação da nuvem



Simplicidade/ Melhor Experiência

Reduzindo o custo de aquisição, operação



Lealdade


Redução da perda de clientes



- Mais de 50% dos SMBs comprariam SVAs do provedor de rede
- 75% dos clientes mudariam de provedor caso este não oferecesse serviço gerenciado baseado em nuvem

Cisco Umbrella

Cloud security platform

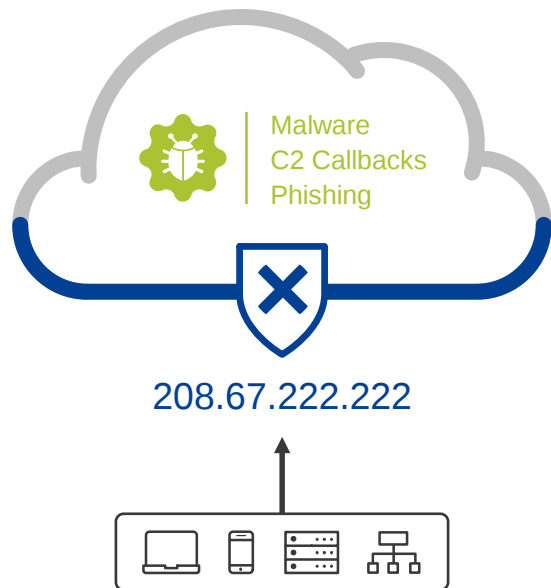

Built into the foundation of the internet

Intelligence to see attacks before launched

Visibility and protection everywhere

Enterprise-wide deployment in minutes

Integrations to amplify existing investments

Intelligence

Statistical models

Co-occurrence model

Identifies other domains looked up in rapid succession of a given domain

Natural language processing model

Detect domain names that spoof terms and brands

2M+ live events per second

11B+ historical events

Spike rank model

Detect domains with sudden spikes in traffic

Predictive IP space monitoring

Analyzes how servers are hosted to detect future malicious domains

Dozens more models

Our efficacy


Discover
3M+
daily new
domain names

Identify
60K+
daily malicious
destinations

Enforce
7M+
malicious destinations
while resolving DNS


Easiest security product you'll ever deploy

- 1 Signup
- 2 Point your DNS
- 3 Done

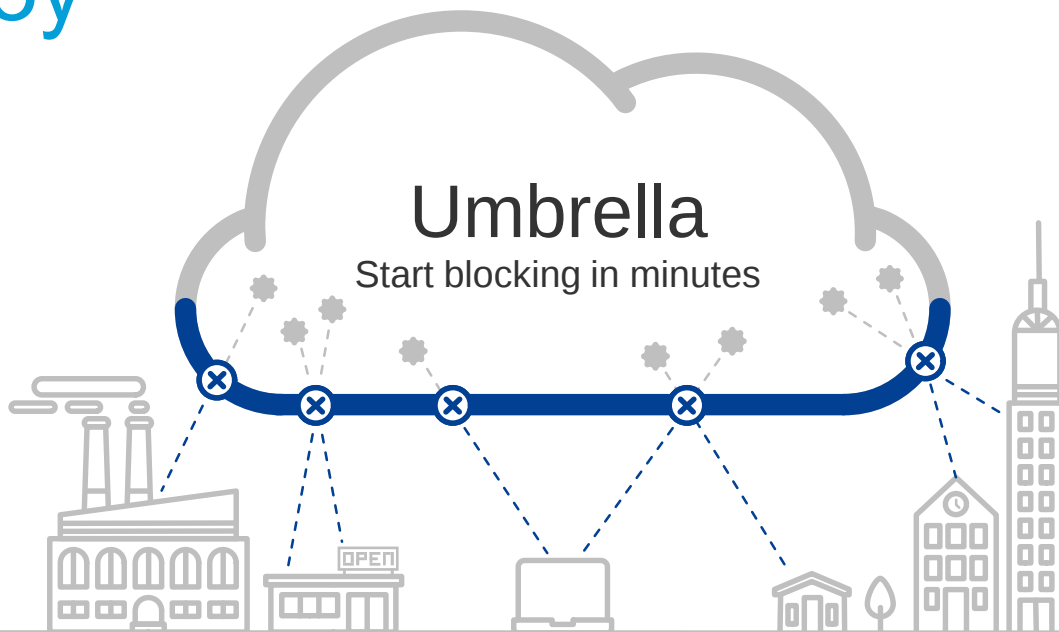


Large Telecom Service Provider Access Portfolio

Service Provider Access Portfolio

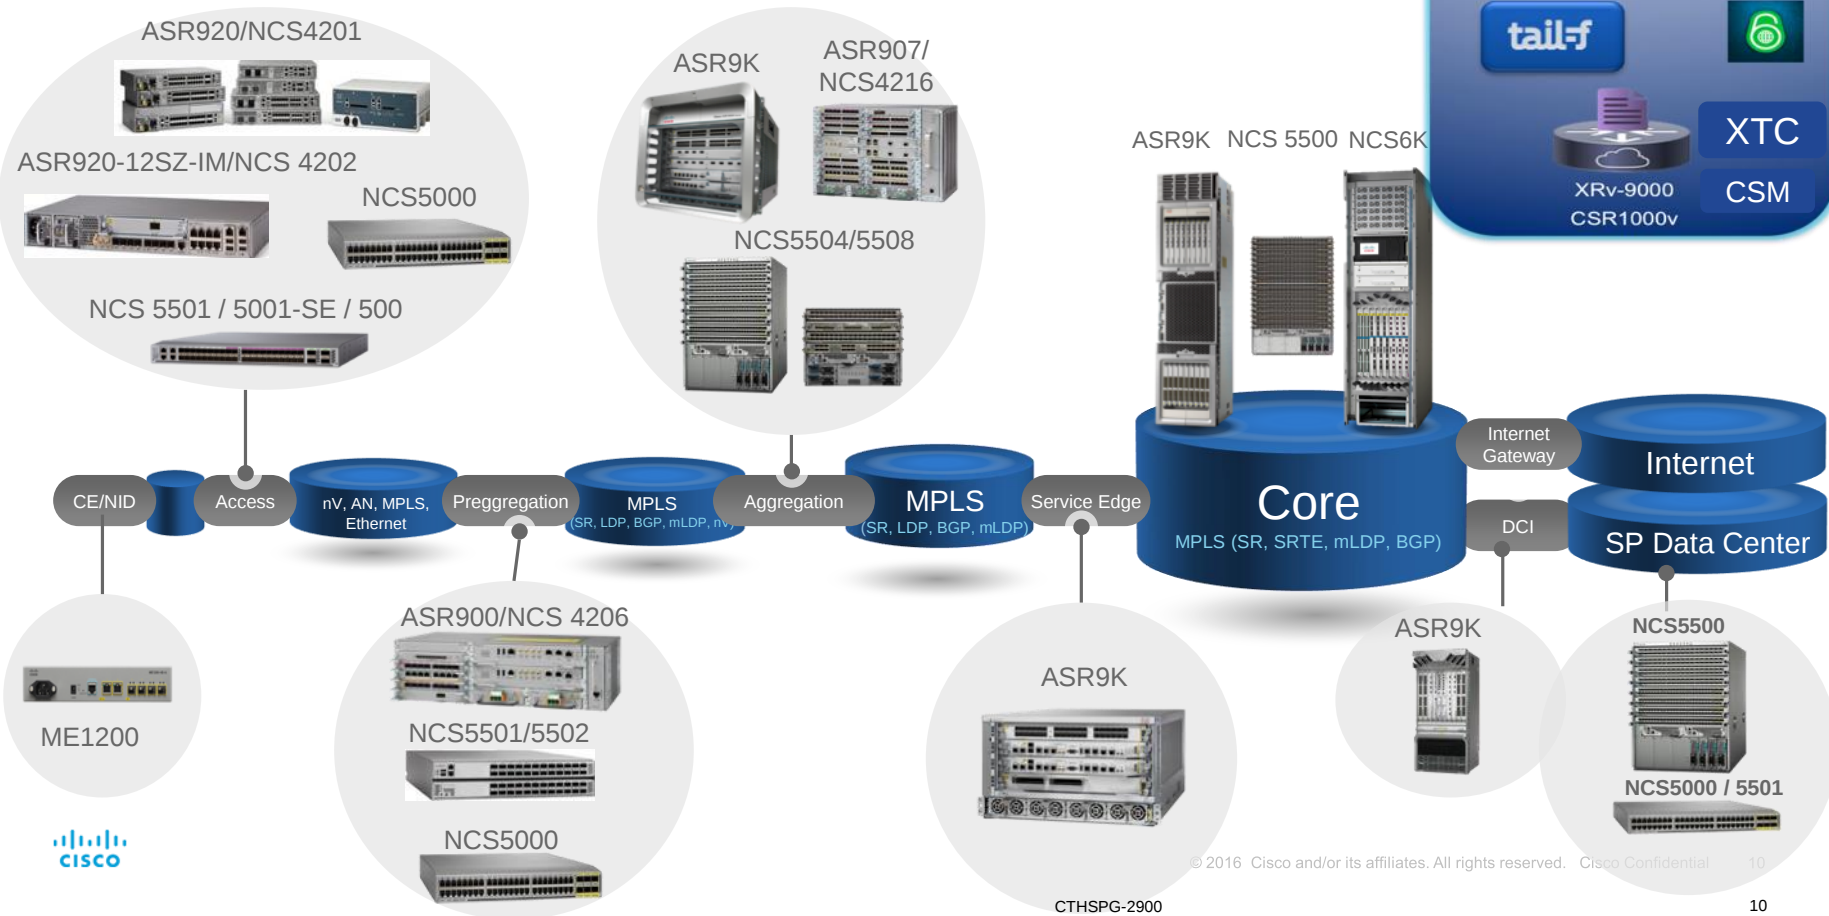

Referencia Regional Service Provider Access Portfolio

Topologia de Referencia

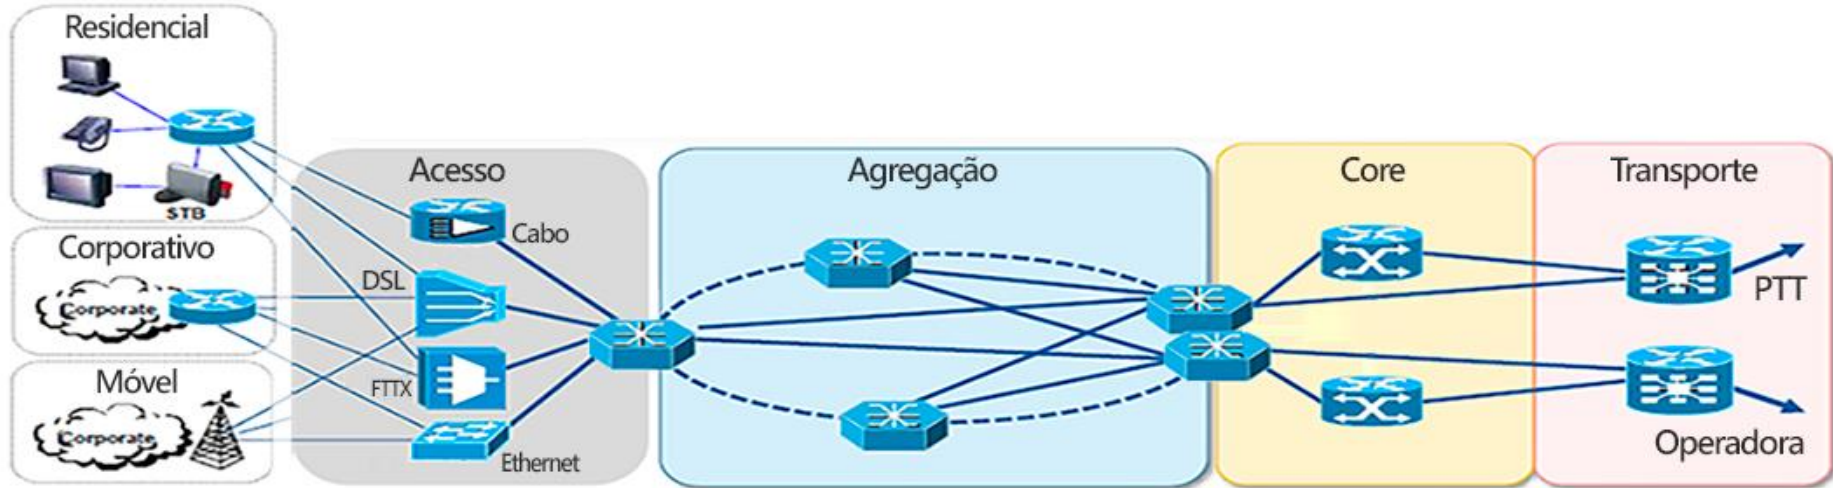

CPE
WiFi
SD WAN
Security
IPv6

FTTH, PON
GPON, STP,
REP, 802.1Q
Etc,

OSPF, MPLS,
VPLS, L3VPN


Segment Routing
BGP-eVPN

BGP, BNG
(PPPoE/IPoE/BRAS)
CGNAT,

NAT64

BGP
BGP Full
IPv4/IPv6

CPE

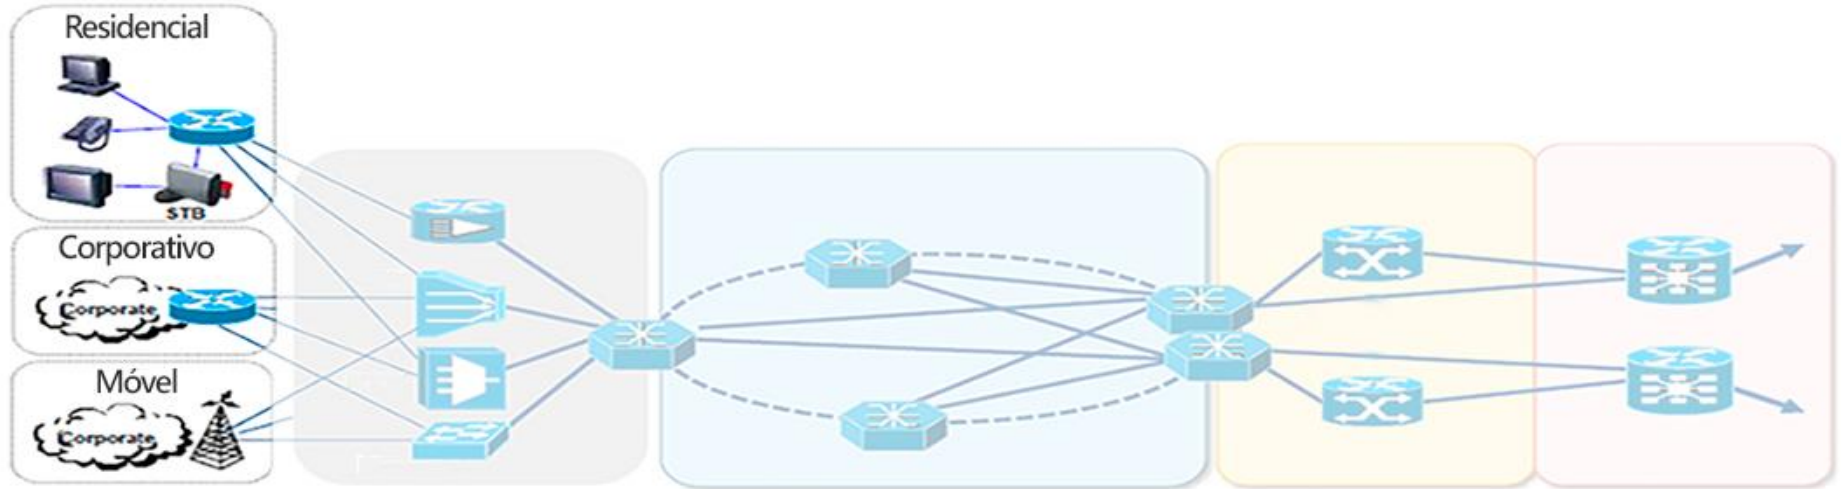

ISR 1000




Meraki



RV



Acesso

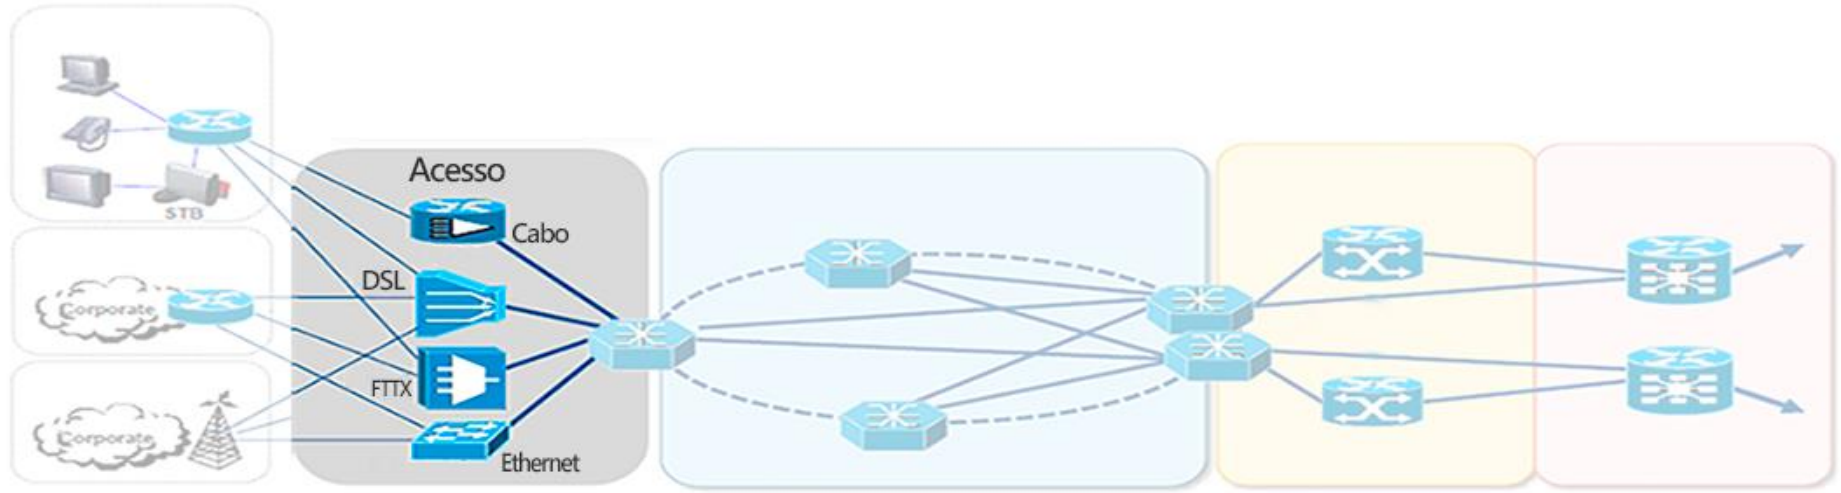

ASR920



NCS 540



ASR 903




ASR 907

Cisco ASR 920 Portfolio



	ASR-920-4SZ-A/ASR-920-4SZ-D	ASR-920-12CZ-A/ASR-920-12CZ-D	ASR-920-10SZ-PD	ASR-920-24TZ-M	ASR-920-24SZ-M	ASR-920-24SZ-IM	ASR-920-12SZ-IM
Size	1RU	1RU	2-4RU	1RU	1RU	1.5RU	1RU
IM Slots	-	-	-	-	-	1	1
Air Flow	Front to Back	Front to Back	-	Front to Back	Front to Back	Front to Back/Side to Back	Front to Back
1G ports	2/6	12/14	10	24	24	24	12/16
10G ports	4	2	2	4	4	4	4

ASR 920 Series

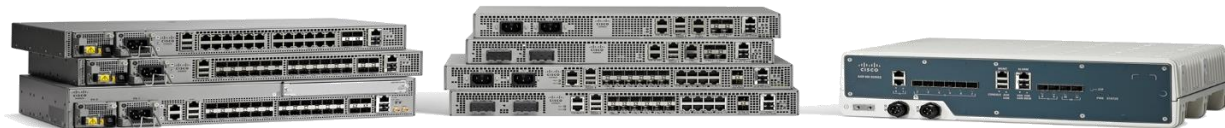

Secured Cell Site Router

12xGE + 4x10GE

Full line rate

One modular slot

-40C to 65C, < 300mm depth

IPSec, GPS, PoE support

Redundant and modular PS: AC and DC

High Density Model

Up to 24xGE + 4x10GE

Full line rate

Fixed or one modular slot

-40C to 65C, < 300mm depth

SyncE/1588/BITS

Redundant and modular PS: AC and DC

Low Density Models

Up to 12xGE and 2x10GE

Full line rate

-40C to 65C, < 300mm depth


Passively cooled model available

SyncE/1588/BITS

Fixed redundant PS: AC and DC

Premium fixed access routers for Carrier Ethernet, Mobile Backhaul, or Fiber to the Home Deployment. Single ASIC and OS across portfolio

Cisco ASR 920 Foundational Pillars

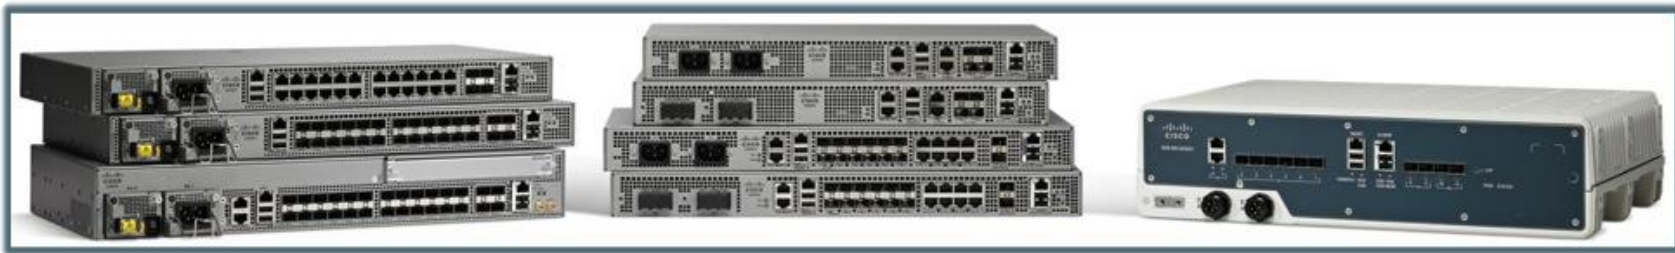

- **Sharing Single OS, Single ASIC:** Optimize network operations and manageability
- **Breadth of product portfolio:** Multiple product variants - Indoor and Outdoor
- **Compact:** Small form-factor and temperature hardened platforms
- **Advanced Carrier Ethernet & MBH DNA:** Single converged platform running on same OS and ASIC addressing needs of both CE and MBH
- **Enables Network Convergence** of Business & Residential Services for both Fixed & Mobile Networks

ASR 900 Chassis



ASR 902 (2RU)

Single Route Switch Processor

4 interface module slots

480G backplane capacity

I-Temp -40C to 65C, < 300mm depth

Redundant and modular PS AC and DC



ASR 903 (3RU)

Dual Route Switch Processor

6 interface module slots

480G backplane capacity

I-Temp -40C to 65C, < 300mm depth

Redundant and modular PS AC and DC

50 msec ISSU support



ASR 907 (7RU)

Dual Route Switch Processor

16 interface module slots

2T backplane capacity


I-Temp -40C to 65C, < 300mm depth

Redundant and modular PS AC and DC

50 msec ISSU support

Compact , Redundant, and High Capacity Small Aggregation Platforms with Flexible Interface Support

Agregação

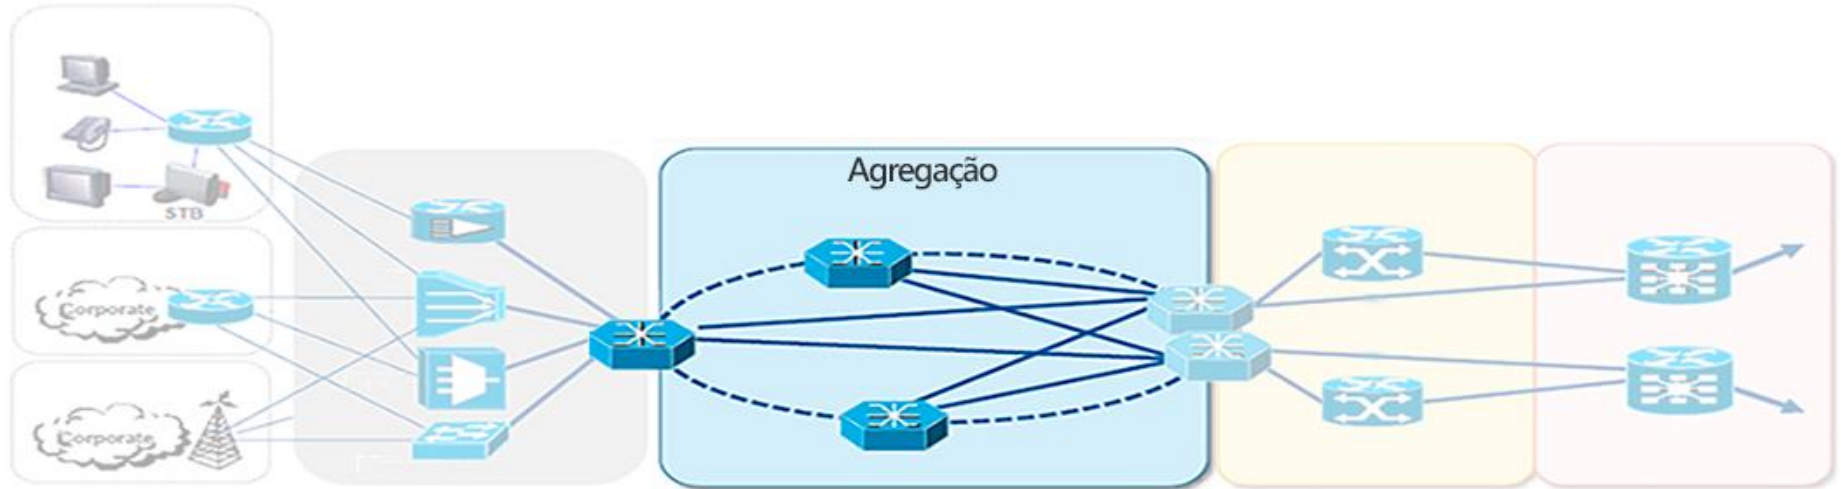

ASR920



NCS 540



NCS5000 /
NCS5500

NCS 5500 Product Family

100G-optimized, Scalable IOS XR Routers



NCS 5501

800 Gbps – 1 RU



NCS 5502

4.8 Tbps – 2 RU



NCS 5504

14.4 Tbps – 7 RU



NCS 5508

28.8 Tbps – 13 RU



NCS 5516


57.6 Tbps – 21 RU

Platforms Comparison

Scale Chart

	NCS 5501	NCS 5501-SE	NCS 5502/-SE	NCS 5508	NCS 5516	NCS 55A1-36H	NCS 5001	NCS 5002	NCS 5011
10G	48+6x4	40+4x4	48x4	8x36x4	16x36x4	36x4	40+4x4	80+4x4	32x4
40G	6	4	48	8x36	16x36	36	4	4	32
100G	6	4	48	8x36	16x36	36	4	4	32
BW Gbps	800	800	4,800	28,800	57,600	3,6000	800	960	3,200
Total Mpps	720	600	5,760*	34,560	69,120	3,340	1,440	1,440	?
Power w	240	320	1,850*	6,940	14,750	1,300	200	300	228
Pfx scale	1.1M+	2.75M	Up to 2.75M IPv4			Up to 8M	128k IPv4 + 16k MPLS		
Buffer	4GB per Forwarding ASIC						16MB		
Queues	96k						2,960		1,280

CORE

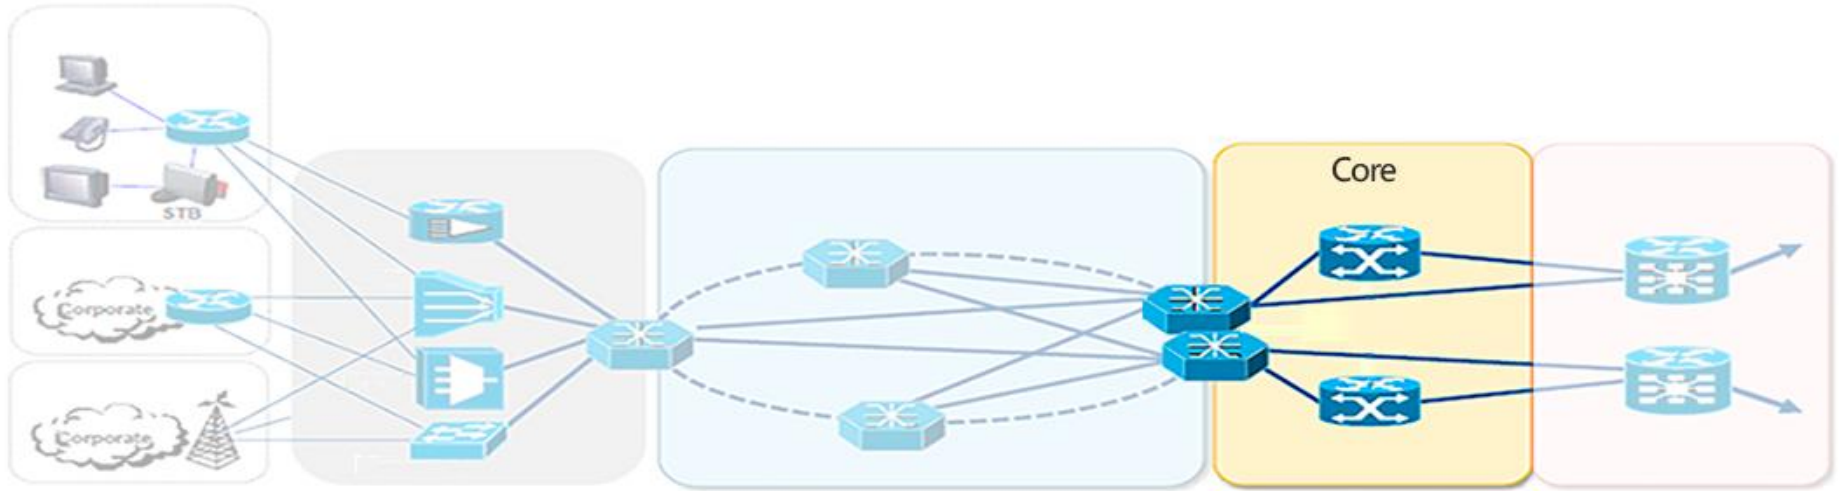

ASR1001/
ASR1002



ASR1001 HX
ASR1002 HX



ASR9001 /
ASR9901

The Cisco ASR 1000 Series Router Family

▶ Compact,
Powerful Router

▶ Business-Critical
Resiliency

▶ Instant-On
Service Delivery

Fixed Chassis

IOS-XE

Modular Chassis

ASR1001-X



2.5 to 20
Gbps

ASR1001-HX



44 to 60
Gbps

ASR1002-X



5 to 36
Gbps

ASR1002-HX



44 to 100
Gbps

ASR1004



10 to 40
Gbps

ASR1006



10 to 100
Gbps

ASR1006-X



40 to 100
Gbps

ASR1009-X



40 to 200
Gbps

ASR1013



40 to 200
Gbps

Performance


	ASR 1001-X	ASR 1002-X	ASR 1001-HX	ASR 1002-HX	ESP40	ESP100	ESP200
Throughput	2.5 – 20 Gbps	5 – 36 Gbps	44 – 60Gbps	44 – 100 Gbps	40 Gbps	100 Gbps	200 Gbps
PPS Performance	19 Mpps	34 Mpps	30 Mpps	79 Mpps	25 Mpps	79 Mpps	152 Mpps
IPv4 Routes	1.0/3.5 M 8/16GB	0.5 M/1 M/3.5 M 4/8/16 GB	1 M/3.5 M 8/16 GB	0.5 M/1 M/3.5 M 4/8/16 GB	1 M/4 M 8 GB/16 GB		
Crypto (IMIX)	5 Gbps	4 Gbps	16 Gbps	25 Gbps	13 Gbps	16 Gbps	59 Gbps
MACsec	Point to Multipoint, 128 bits only	N/A	Point to Multipoint, up to 256 bits	Point to Multipoint, up to 256 bits	Point to Multipoint for GE and TenGE EPAs, up to 256 bits		
ZBFW Sessions	2M			6M	2M	6M	
NAT Sessions	2M			4M	2M	4M	
AVC (course)	5 Gbps	18 Gbps	30 Gbps	52 Gbps	23 Gbps	76 Gbps	
CUBE enterprise	12K	14K	16K				
Broadband subs	8K	29K		58 K	64 k	58k	TBD
QoS (queues)	16K	116K		232 K	128 K	232 K	464 K
Suite-B	Yes				No	Yes	
Clocking	SyncE	SyncE, GPS, BITS	SyncE, GPS	SyncE, GPS	SyncE With ELC or SyncE SPA, BITS		
TCAM	10 Mbit	40 Mbit		80 Mbit	40 Mbit	80 Mbit	2 x 80 Mbit

Série ASR 1001-X


É Caprichoso e Garantido !!!



Cisco ASR9000/ASR9900 Portfolio

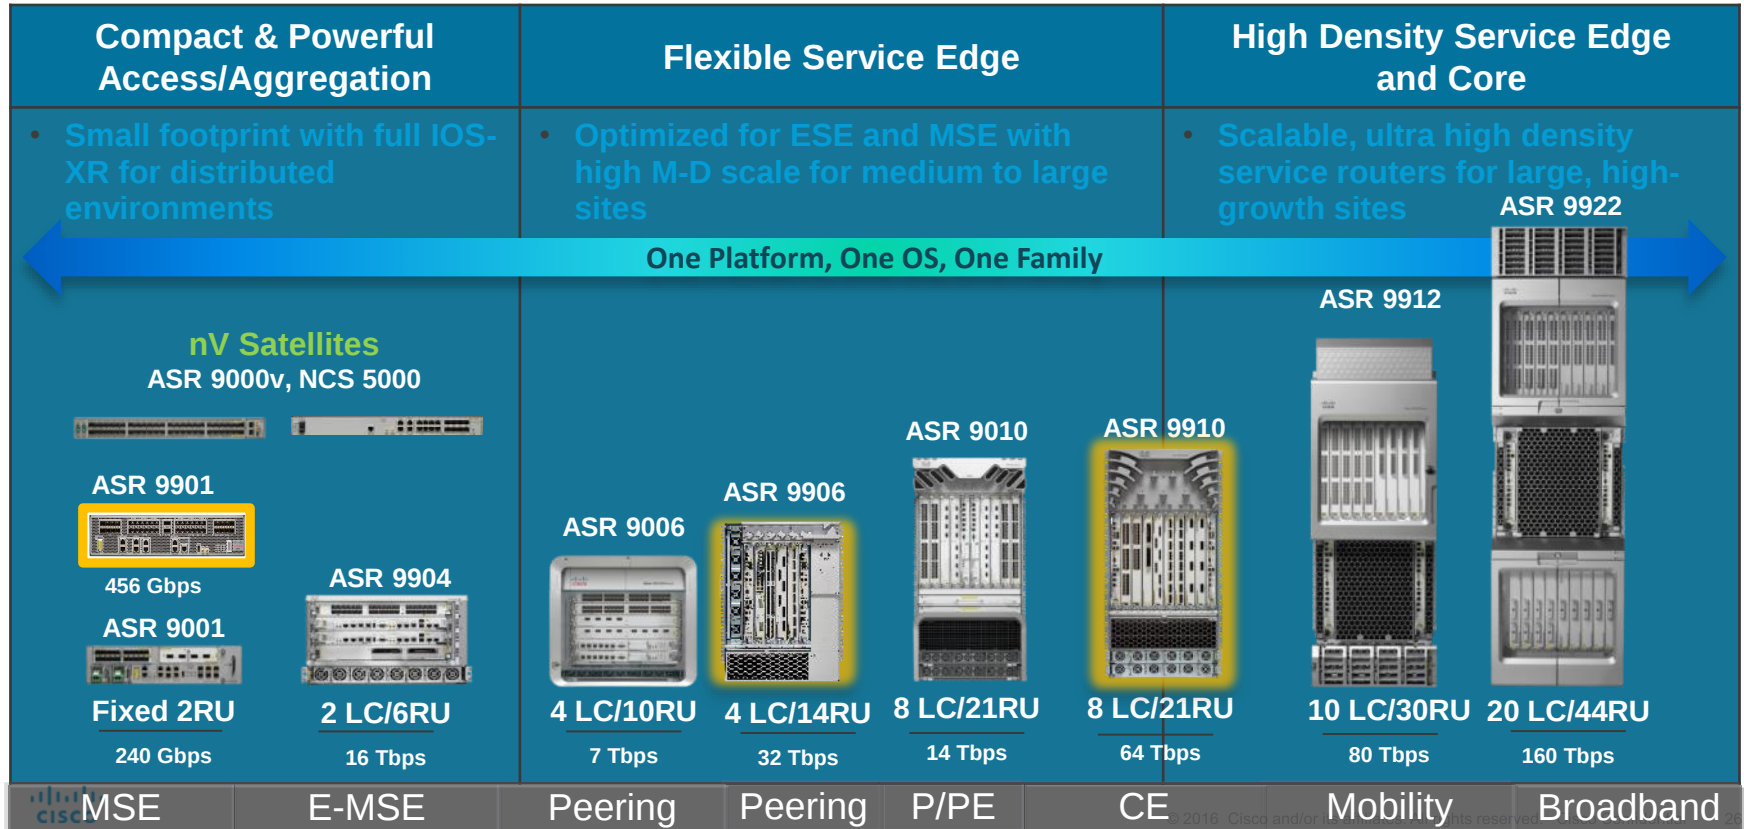

Transporte

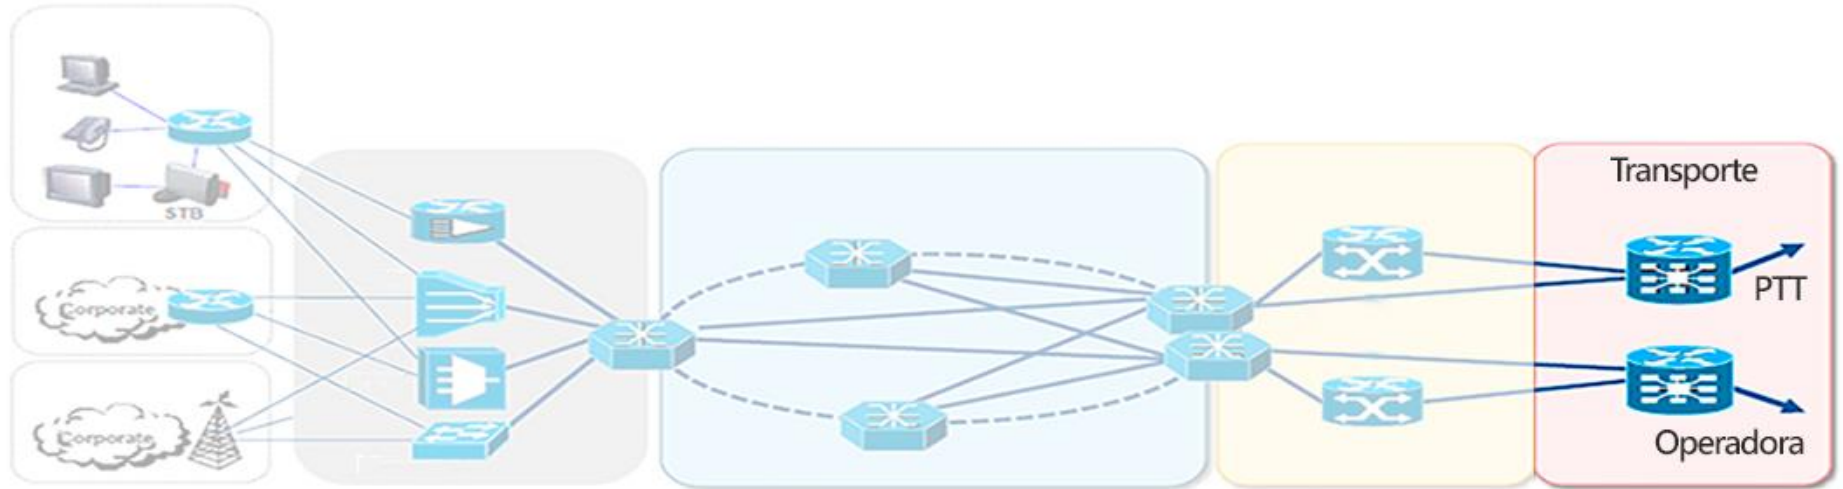

NCS5500-SE



ISR-4k




ASR9000 /
ASR9900



ASR-1k

Pay-As-You-Grow with Cisco ISR 4000 Series

Investment Protection Without Oversubscription

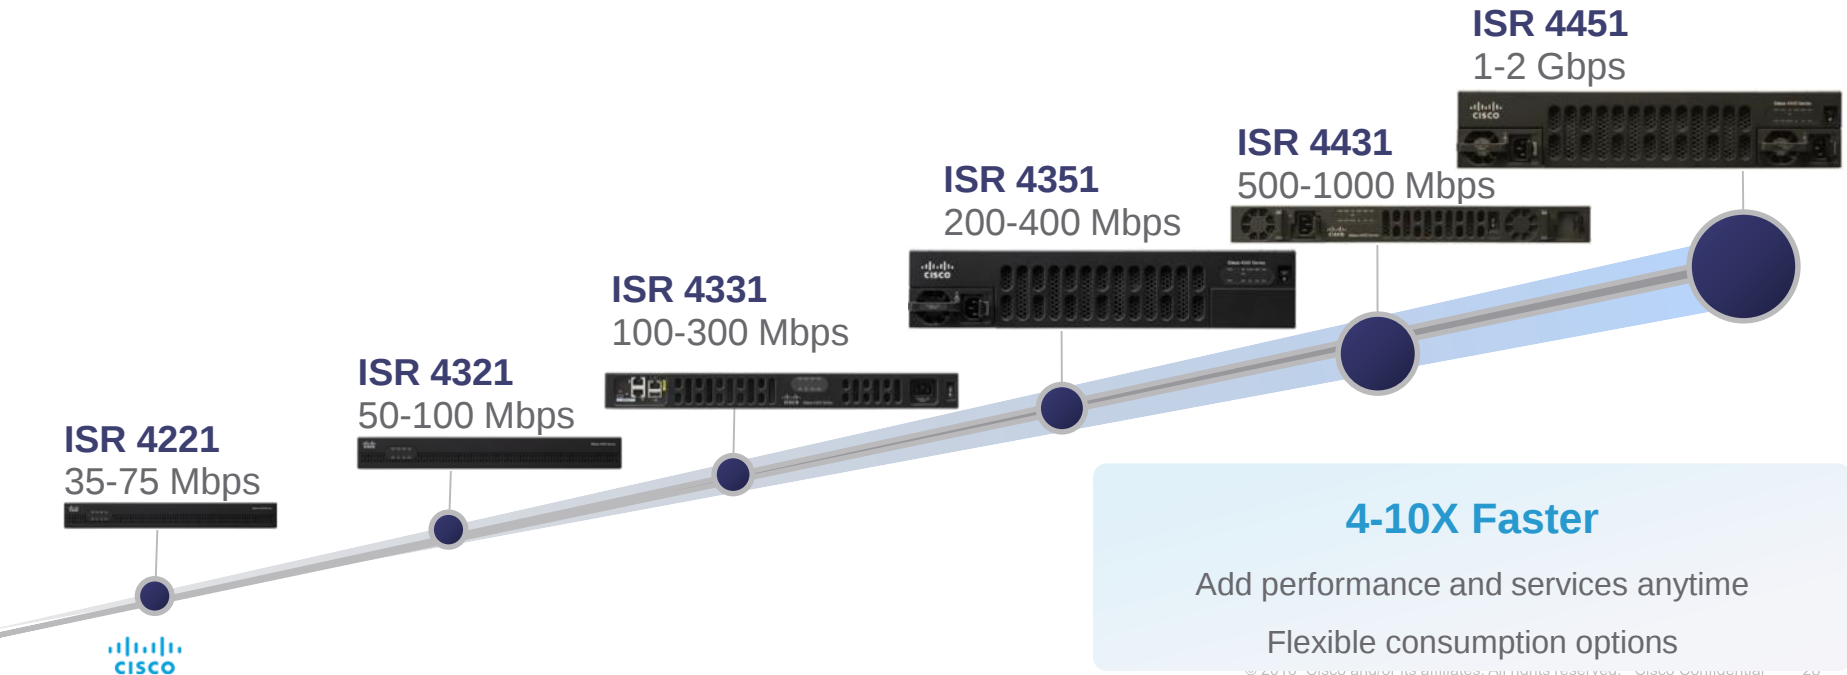


ISR4K Specifications Summary


Platform	Performance	Height	GE / RJ45 / SFP	NIM	SM-X / DW	Default / Max Memory	Default / Max Flash Memory	RPS
ISR 4451	1 – 2 Gbps	2RU	4/4/4	3	2 / 1	4GB / 16GB	8GB / 32GB	Yes
ISR 4431	500 – 1000 Mbps	1RU	4/4/4	3	0	4GB / 16GB	8GB / 32GB	Yes
ISR 4351	200 – 400 Mbps	2RU	3/3/3	3	2 / 1	4GB / 16GB	4GB / 16GB	No
ISR 4331	100 – 300 Mbps	1RU	3/2/2	2	1 / 0	4GB / 16GB	4GB / 16GB	No
ISR 4321	50 – 100 Mbps	1RU	2/2/1	2	0	4GB / 8GB	4GB / 8GB	No

Exemplos de Topologia


Service Provider Portfolio (P)

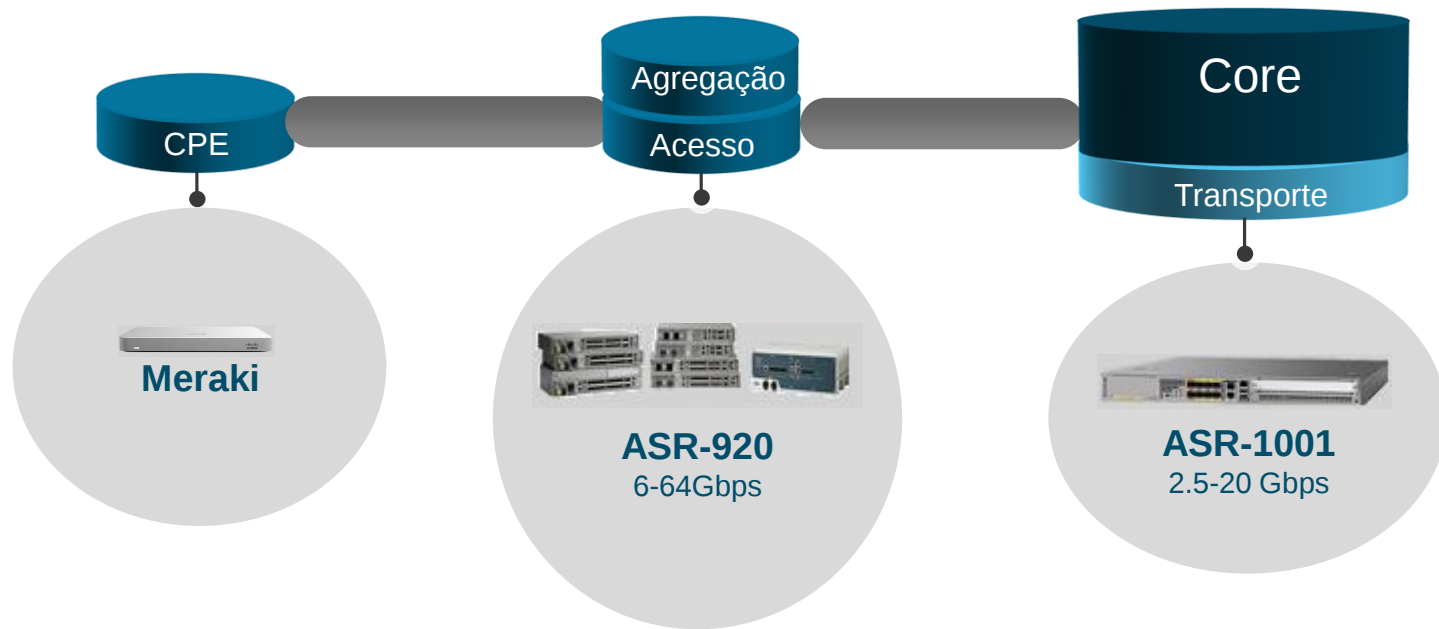


Service Provider Portfolio (P1)

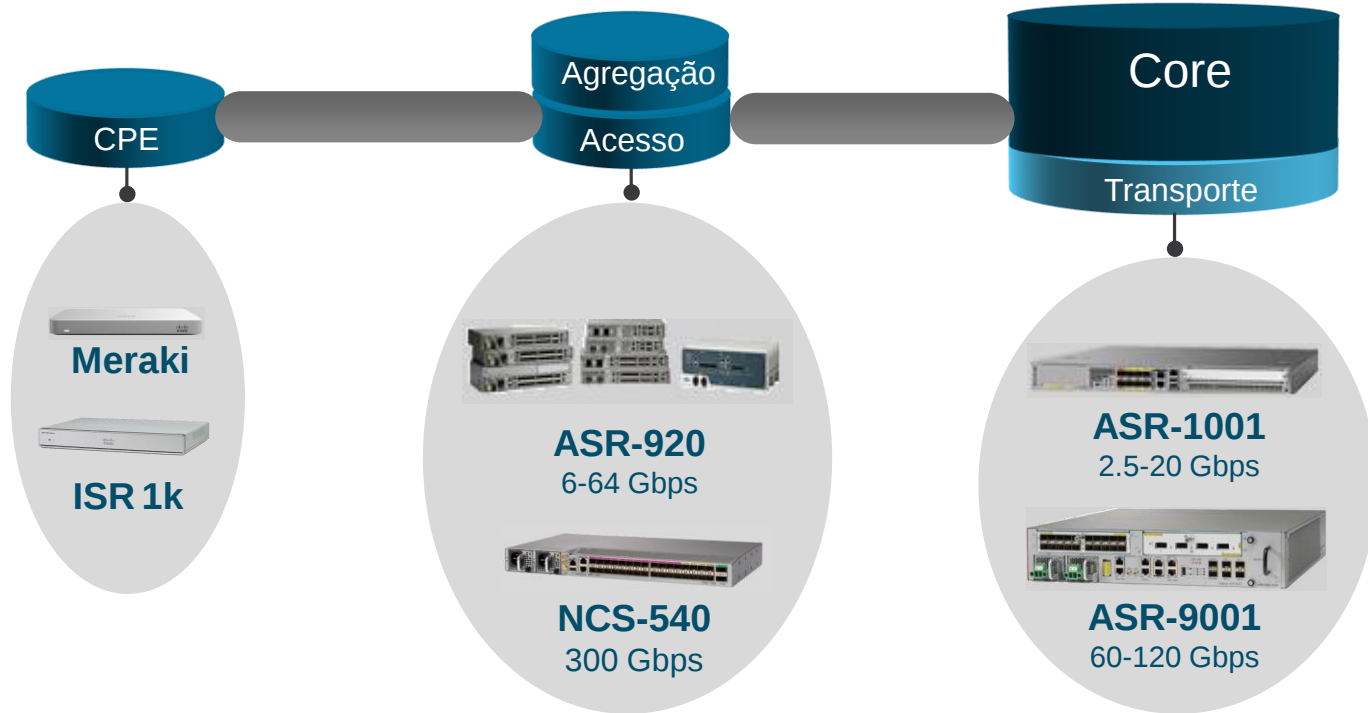


Service Provider Portfolio (M)

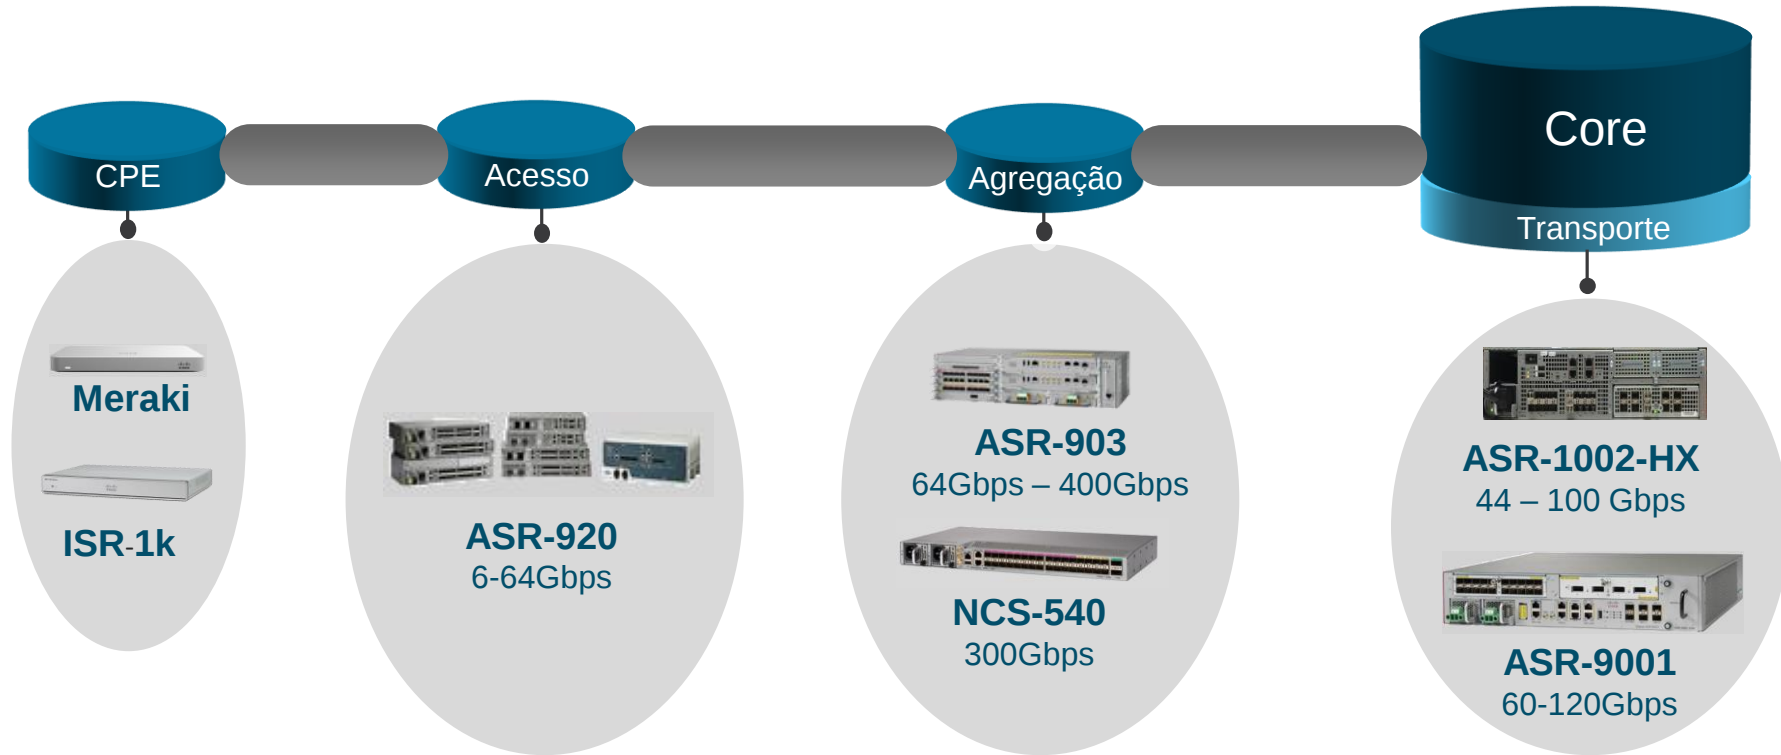

Service Provider Portfolio (M1)

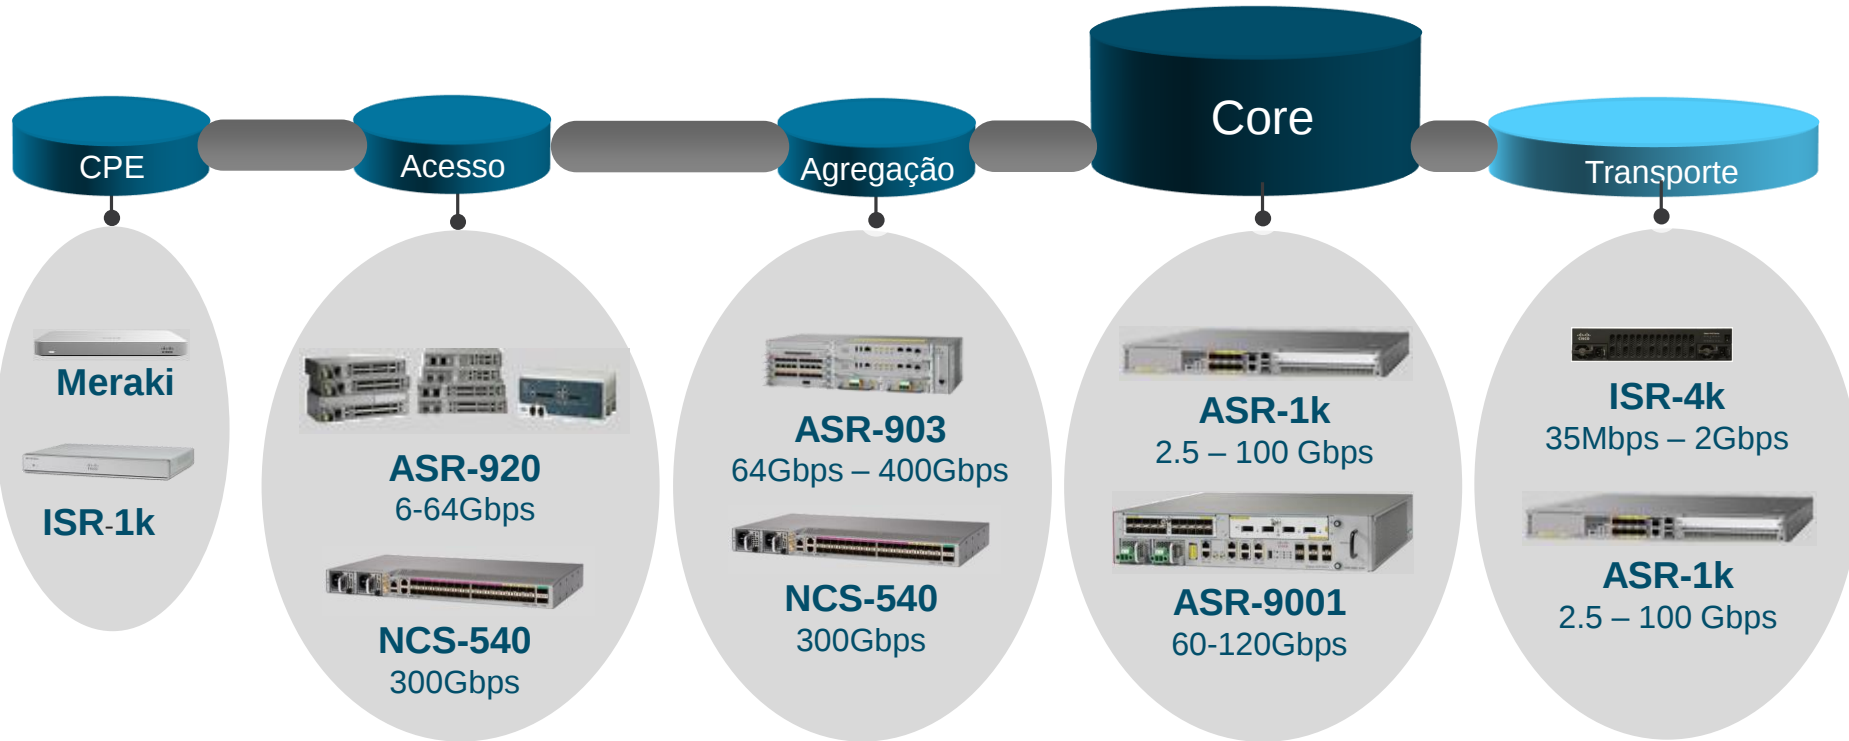


Service Provider Portfolio (G)

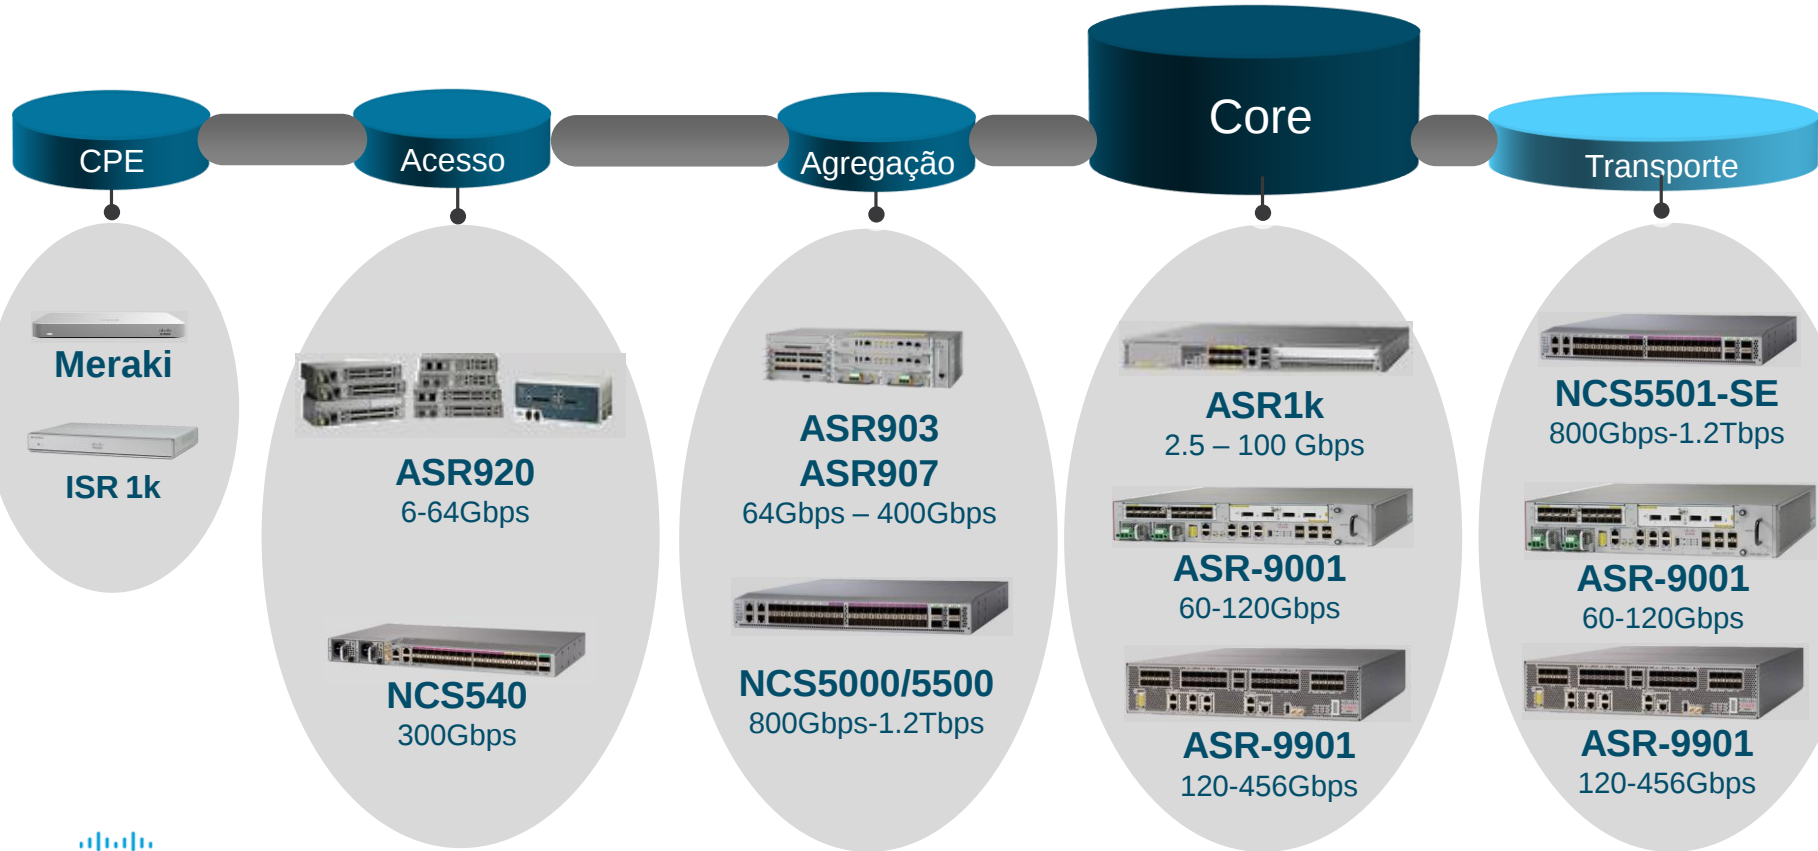

Novidade: NCS 540

NCS 540 Front & Back Details

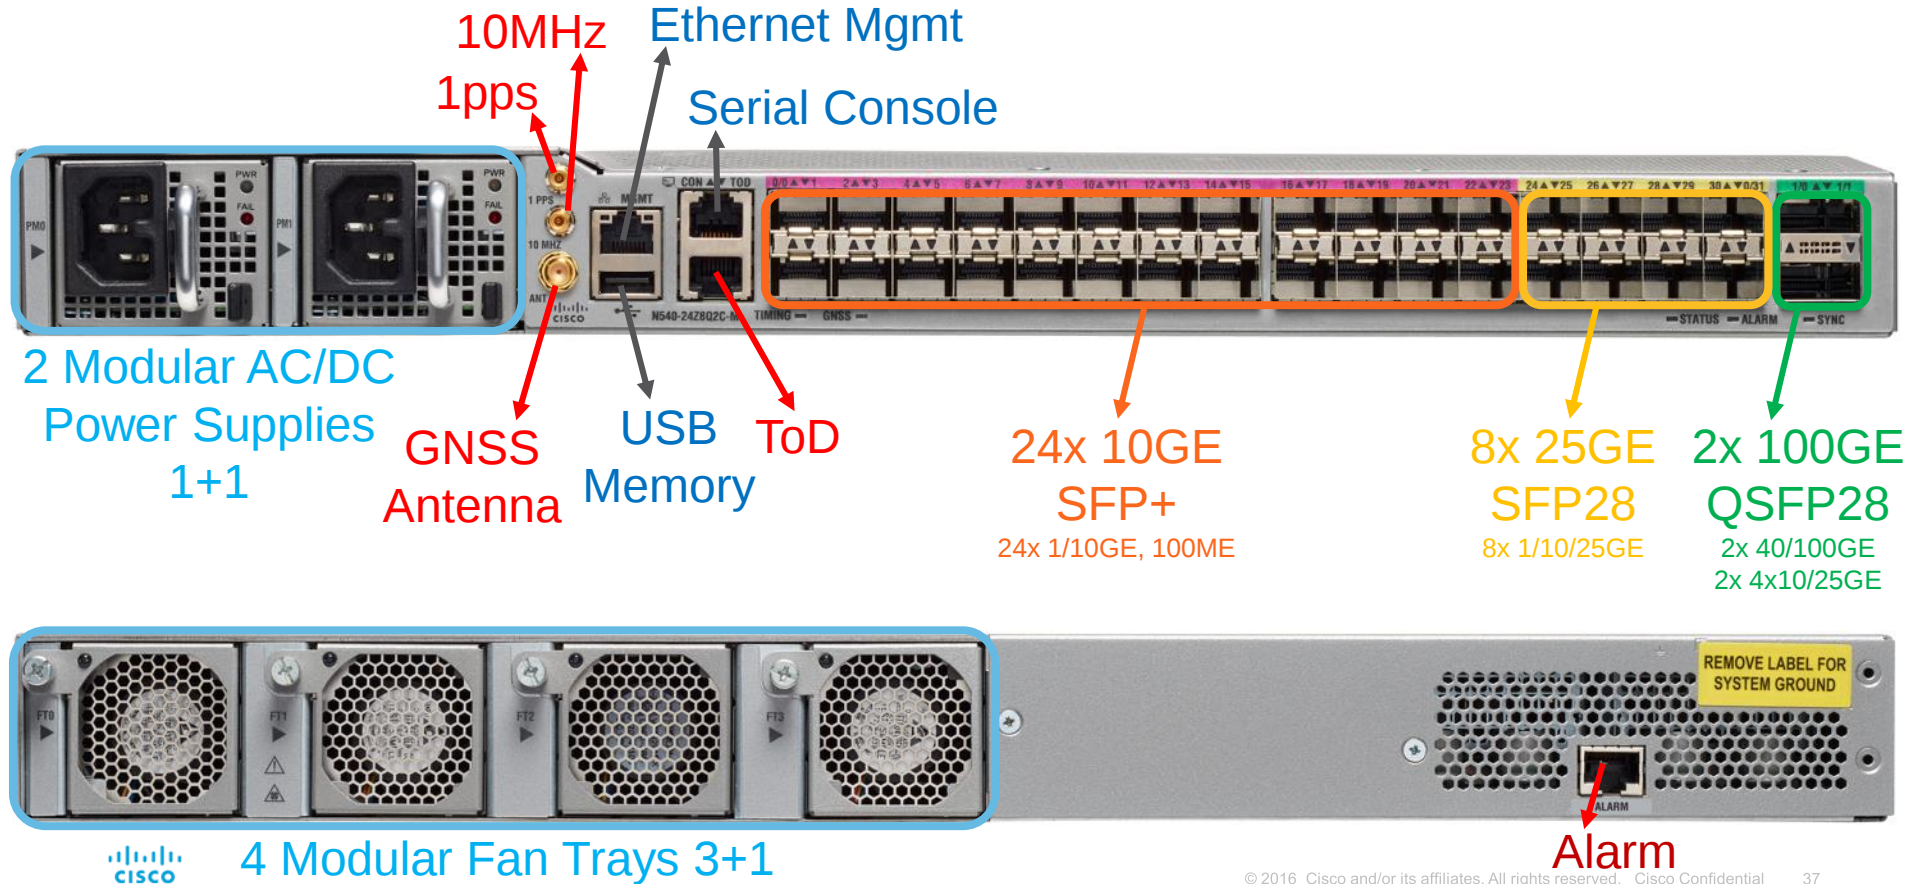

N540-24Z8Q2C-SYS

ASIC/CPU/Mem

- 300 Gbps BCOM, Intel Broadwell 4C 1.8GHz CPU
- 32GB RAM, 128G SSD

Port Config

- 24x1/10G SFP+, 8x 25G SFP28, 2x100G QSFP28
- DWDM/ZR support on all SFP+ interfaces

PSU/Fan

- Modular & redundant PSUs and fans
- Front to back airflow

Temp Range

- iTemp 40C to +70C
- Conformal coated SKU for hot humid conditions

Optics

- 1/10G: SR/LR/ER/ZR/DWDM
- 25G: SR/LR, 40G: SR/LR/ER, 100G: SR/LR/ER4L

Timing

- 1PPS in/out, 10Mhz in/out, ToD, Internal GNSS
- SyncE, G.8265.1, G.8275.1/2, Class B BC

Service Scale

- 256 L3VPN, 2K PWs

Software


- FCS 64 bit IOS XR 6.3.2
- Full SW feature parity with NCS 5500

Shipping



SFP+	SFP28	QSFP28
• 24 x GE	• 8 x GE	
• 24 x 10GE	• 8 x 10GE	• 8 x 10GE
	• 8 x 25GE	• 8 x 25GE
		• 2 x 40GE
		• 2 x 100GE

NCS 540 5G Readiness

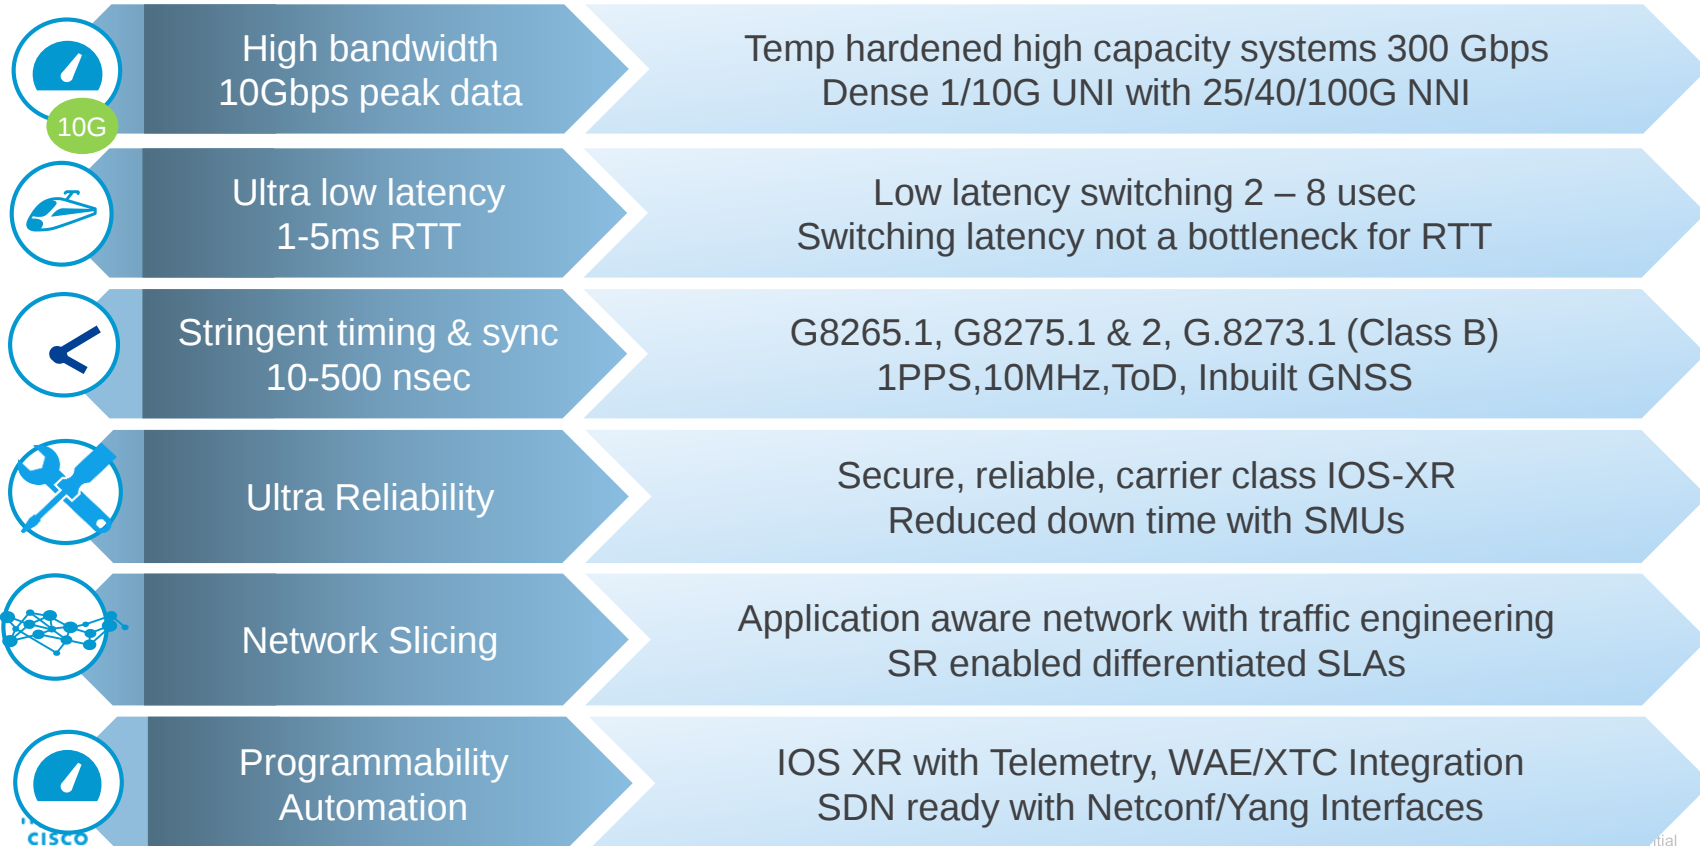

Novidade: ASR9901

ASR 9901 Highlights

FCS Mar'18
IOS XR 6.4.1



Form Factor & BW

- **2 RU** box with 2 Tomahawk NPU (ASR 9001 is 2 RU with 2 Typhoons)
- Depth of ~23 inches,(9001 is 18")
- 456G Duplex BW (9001 is 120G Duplex)

Ports / Port Density

- Fixed ports available; **no MPAs**
- 42 ports on the faceplate : 16X1G, 24X10G, 2X100G(QSFP28)
- 1G ports : LAN & MACSEC
10G ports: LAN & MACSEC
100G port : LAN & MACSEC

SW & Licensing


- **64 bit XR only**
- PAYG mode for **120G, 256G and 456G**
- Full feature parity with Tomahawk feature-set

Mechanicals & Commons


- Redundant Power & Fan-trays
- Front to back Airflow
- NEBS, EMC Compliant
- All ports/power cabling on front plate; fan trays on backside
- Typical Power Consumed : 1200W



ASR 9901 Port mapping

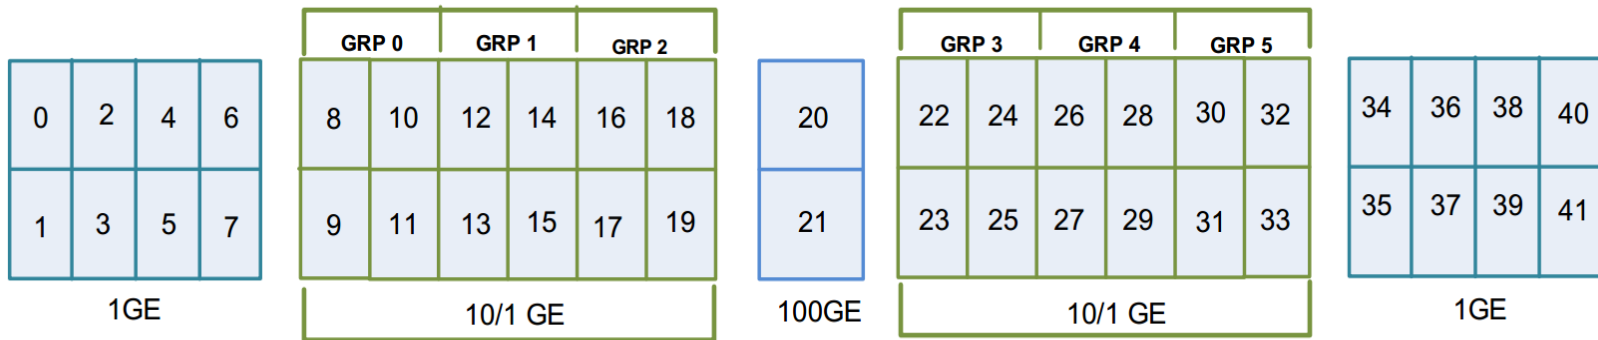

Service Provider Access Portfolio

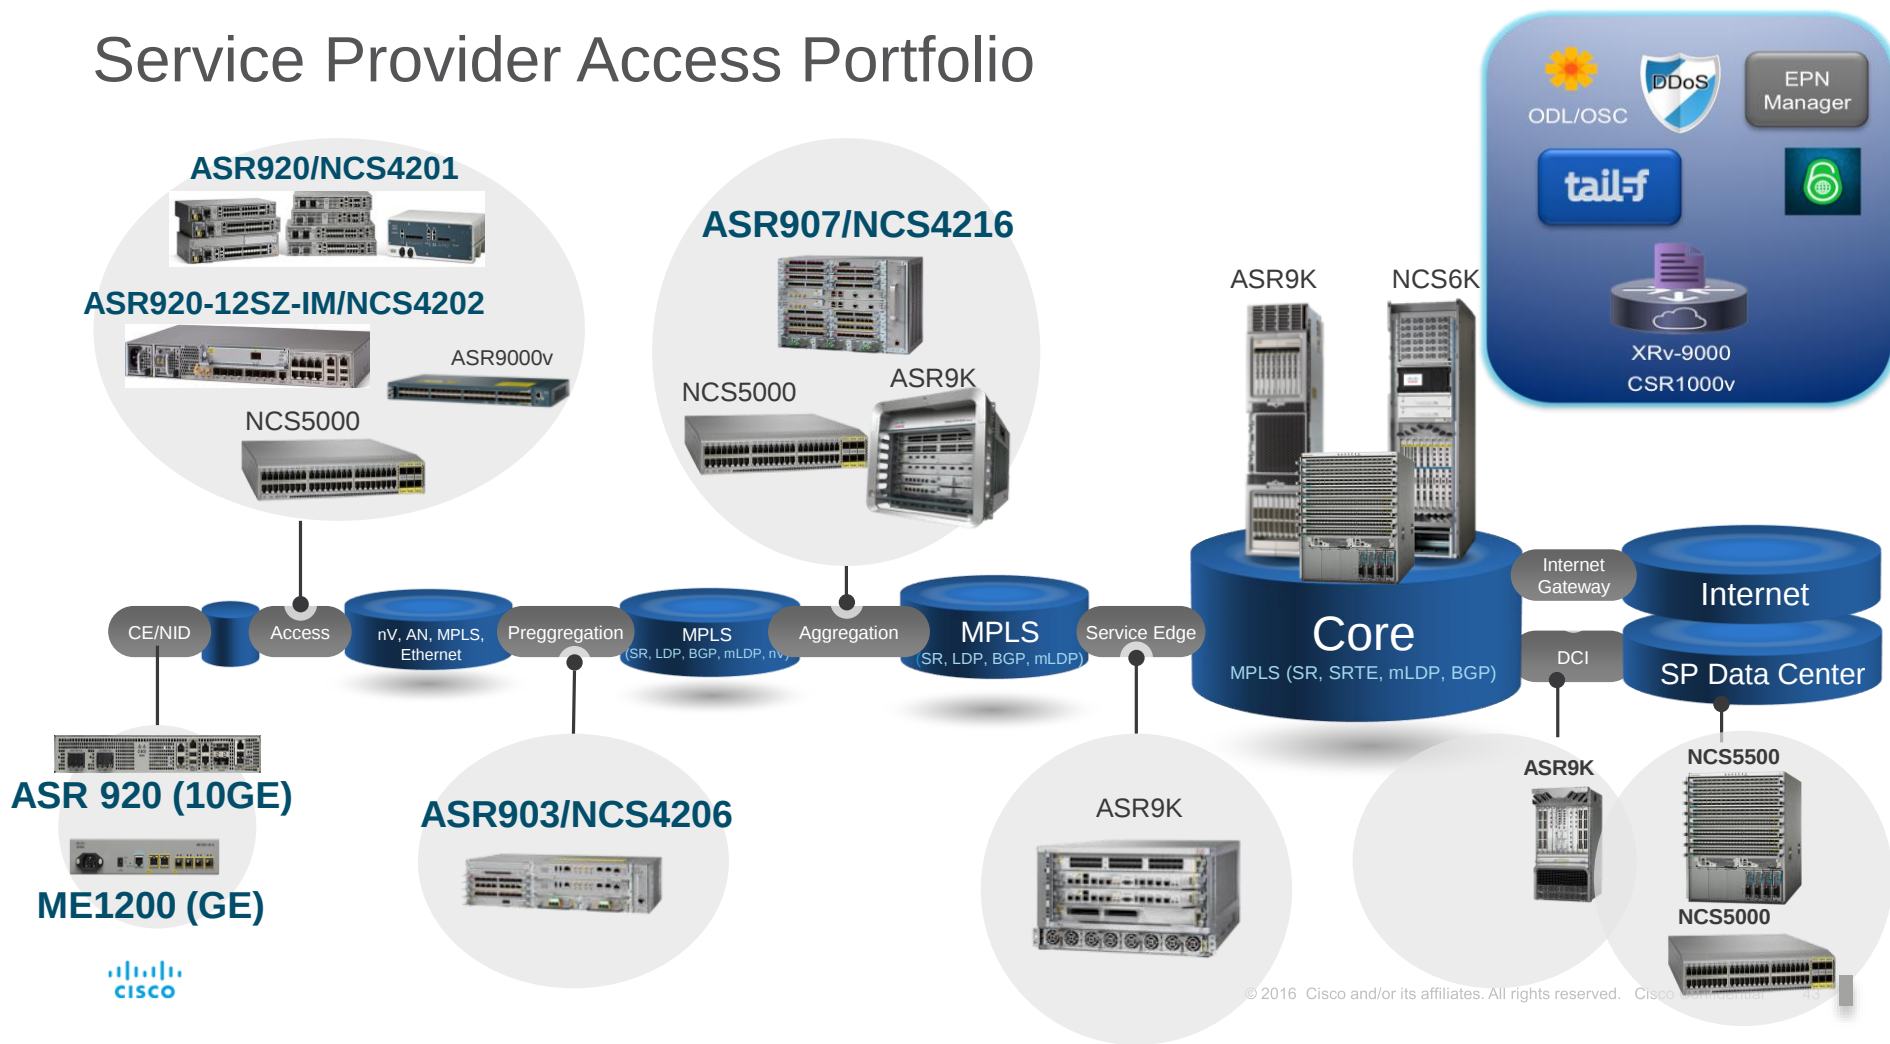

Service Provider Access Portfolio



OBRIGADO !!!

Guilherme Araujo
guaraujo@cisco.com

